Anwendung/Application :

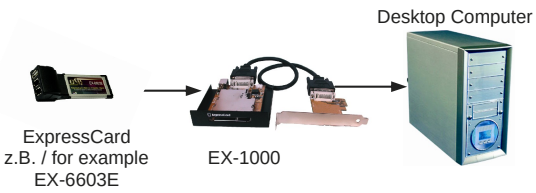

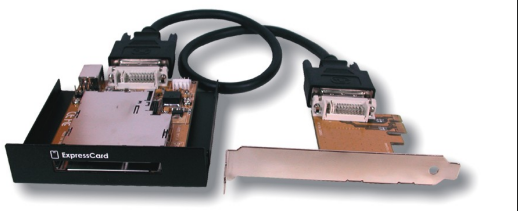

Operating System (OS): | Geprüft/Approved: | Verpackung/Packing:

PCI-Express Adapter für ExpressCard Karten, 3.5“ Bay

Beschreibung :	• Der EX-1006 ist ein PCI-Express Bus zu ExpressCard Adapter um auf einfache weise 34- und 54mm ExpressCard Karten in einem 3.5“ oder 5.25“ Bay Einschub in den Rechner zu integrieren. Der EX-1006 ist die ideal Lösung um Ihre ExpressCard Karte im Notebook sowie als komfortabler 3.5“ oder 5.25“ Fronteinbau in Ihrem Desktop Rechner einzusetzen. Er ist mit dem hochwertigen Texas Instruments Controller ausgestattet.
Merkmale :	• 3.5“ oder 5.25“ Fronteinbau Bay • Unterstützt 34- und 54mm breite ExpressCard Karten • PCI-Express Schnittstelle kompatibel zu 1.0a Spezifikation • PCI-Express Erweiterte Fehler Beschreibung (Unterstützt ECRC) • Unterstützt einen USB Port für die Spezifikation der ExpressCard • Unterstützt „Hot Swapping“ • Benötigt keine Treiber
Chip-Set :	• Ricoh R5538 Controller
Anschlüsse :	• 1 x ExpressCard 34–und 54mm • 1 x USB 2.0 Type-B Buchse • 1 x 10 Pin Interner USB 2.0 Anschluss
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 10 bis 90%
Hardwaresysteme :	• PCI-Express x1 bis x16
Abmessung / Gewicht :	• 98 x 101mm / 400g
Lieferumfang :	• EX-1006, 3.5“ Bay, 1 x Kabel, 5.25“ Adapter Bay, Handbuch

PCI-Express adapter for ExpressCard card, 3.5-inch Bay

Description:	• The EX-1006 is a PCI-Express to ExpressCard Bay to easily add an ExpressCard (54 or 34mm) to a 3.5–or 5.25-inch front bay to desktop PC with PCI Express Slots. It is an ideal solution to share your Notebook computer’s ExpressCard devices with your desktop PC. He provide a high quality controller from Texas Instruments.
Feature :	• Supports Standard Internal 3.5- or 5.25-inch Front Bay • Support 34- and 54mm ExpressCard • Fully Compliant with PCI-Express Base Specification, Revision 1.0a • PCI Express Advanced Error Reporting Capability Including ECRC Support • Supports one USB Port per ExpressCard Specifications • Support “Hot Swapping” • Transparent Installation, no Added Driver Required
Chip-Set :	• Ricoh R5538 Controller
Connectors :	• 1 x ExpressCard 34- and 54mm • 1 x USB 2.0 Port with Type-B • 1 x 10 pin Header Connectors
Operating Temperature : Operating Humidity :	• 0 to 55^{0}C • 10 to 90%
Hardware system :	• PCI-Express x1 to x 16
Size / Weight :	• 98 x 101mm / 400g
Packaging contents :	• EX-1006, 3.5-inch Bay, 5.25-inch adapter bay, Cable, Manual